

# TIGER

## INTELLIGENT CAMERA SERIES

### T4940 CCD 16 MP CXP-3 CoaXPress®



#### Imperx: T4940

The Tiger T4940 CCD camera is an advanced, ruggedized, and economical digital camera providing 4896 x 3264 resolution, frame rates up to 8.8 fps. The camera features programmable image resolution, frame rates, gain, offset, external triggering, strobe outputs, transfer function correction, temperature monitoring, and user programmable LUTs, FFC, and Defect Correction Tables. The camera is fully field upgradable with optional forced air cooling available.

#### Specifications

Feature	Description	Feature	Description
Output Interface	CXP-3 CoaXPress® w/PoCXP	Data Correction	Bad pixel correction, four 12-bit LUTs, 2 FFC, Black level, Vertical smear
Resolution	4896 (H) x 3264 (V), 4920 (H) x 3280 (V) max	Minimum Illuminations	1 Lux, F/ 1.4
Sensor	ON Semiconductor KAI-16050 Color/Mono/ Sparse CFA	Lens Mount	F-Mount (Default), M42, EOS Canon
Sensor Format	CCD, APS-H optical format, 32.3 mm diagonal	Supply Voltage Range	24 V CoaXPress power over cable
Pixel Size	5.5 microns square	Power Consumption (Ruggedized)	9.12 W – 9.60 W
Frame Rate	8.8 fps	Power Consumption (Industrial)	9.60 W – 10.08 W
Dynamic Range	64 dB	Size - Width/Height/Length	69.5 mm (W) x 69.5 mm (H) x 51.5 mm (L) (Ruggedized, no fan) 69.5 mm (W) x 76.3 mm (H) x 51.5 mm (L) (Industrial, with fan)
Output Bit Depth	8-bit, 10-bit, 12-bit	Weight	461g
Noise	12 electrons rms	Vibration, Shock (Ruggedized)	100G (20-200Hz) XYZ/ 1000G
Analog Gain Control	Manual, Auto (Rug.); 0 – 30 dB (Ruggedized), 0 – 24 dB (Industrial)	Vibration, Shock (Industrial)	20G (20-200Hz) XYZ / 200G
Black Level Control	Manual, 1024 steps, Auto	Environmental (Ruggedized)	-40 °C to +85 °C Operating, -50 °C to +90 °C Storage
Digital Gain	1x to 4x, 0.001x steps	Environmental (Industrial)	-10 °C to +60 °C Operating, -50 °C to +90 °C Storage
Digital Offset	-512 to +511, 1 step increments	Humidity	10% to 90% non-condensing
AEC/AGC	Yes (Ruggedized)	MTBF	TBD
White Balance	Manual, Auto, Off	Regulatory	FCC Part 15 Class A, CE, China RoHS
Shutter Speed	1/100,000 to 1/8.8 s (nom) in 1 µs steps		
Exposure Control	Auto (Ruggedized), External, Internal		
Long Integration	Up to 16 seconds		
Regions of Interest (ROI)	2 ROIs (Ruggedized) or 1 ROI (Industrial). Any line to any line, any pixel to any pixel		
Binning H/V	1x, 2x, 4x (Independent for H & V)		
Trigger Inputs	External, Pulse generator, Software, Computer		
Trigger Options	Edge, Pulse width, Trigger filter, Trigger delay, Debounce		
Trigger Modes	Standard, Double, Fast		
External Inputs/Outputs	2 IN (OPTO, LVTTTL) / 2 OUT (OPTO, TTL)		
Strobe Output	2 strobes (Ruggedized) or 1 strobe (Industrial). Programmable position and duration		
Pulse Generator	Yes, programmable		

## Imperx: T4940 Applications


The T4940 incorporates a number of unique features tailored to reduce system complexity, maximize interface bandwidth, and expand the usable operational range.

Aerospace • Satellites • Surveillance • Military and Non-Military Ground Vehicles • Ball Grid Array • Printed Circuit Board Inspection • Motion Analysis • Broadcast Television • Telepresence • Unmanned Aerial Vehicles • Machine Vision • Reconnaissance • Intelligent Traffic Systems • Aerial Imaging • Open Road Tolling Systems • Situational Awareness • Scientific • Particle Velocity

## Absolute Quantum Efficiency


Monochrome with Microlens

KAI-16050

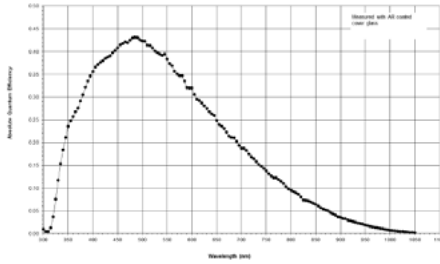


Color (Bayer RGB) with Microlens

KAI-16050

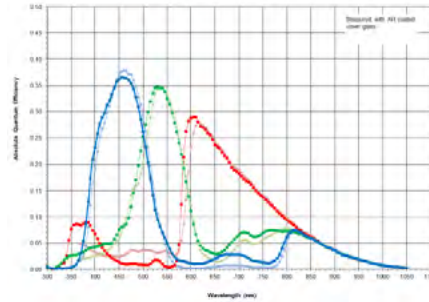


Color (TRUESENSE Sparse CFA) with Microlens KAI-16050

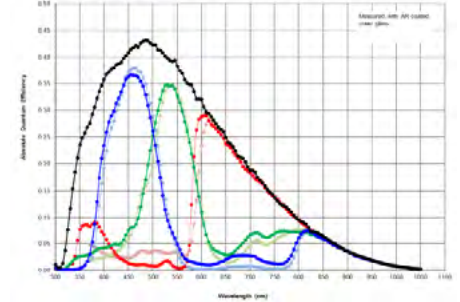


## Dimensions


### FRONT

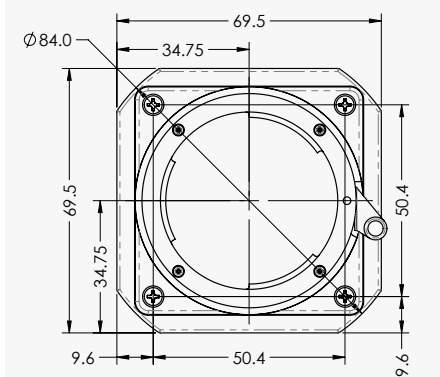

### BACK

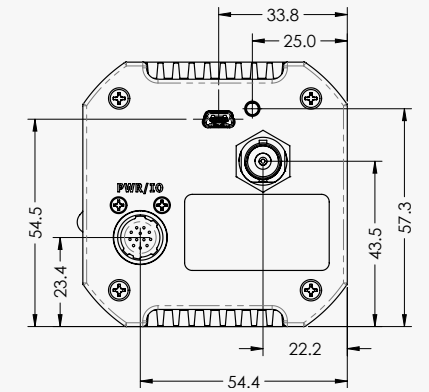

### SIDE

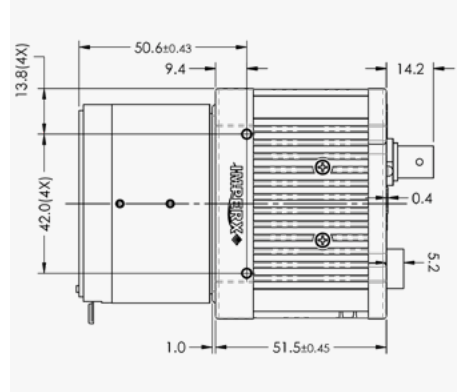

## Ordering Information

### Output Interface

CXP-3 CoaXPress® w/PoCXP

### Sensor Types available

Monochrome  
Bayer Color  
Sparse CFA

### Lens Mounts

F-Mount (default) EF Canon  
M42


### Ordering

Ruggedized Industrial

### Accessories (Sold Separately)

CBL-PWIO01: Cable Power; Hirose 12p (F) to loose end; 2 meters

## Gen<I>Cam Compliant Camera Configurator

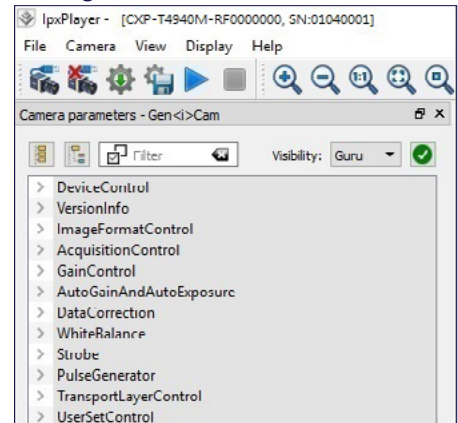

## Hirose Connectors

### I/O Interface



- |                 |                    |
|-----------------|--------------------|
| 1. Reserved     | 7. OUT1 TTL Signal |
| 2. Reserved     | 8. IN1 OPTO +      |
| 3. Reserved     | 9. IN2 TTL Signal  |
| 4. Reserved     | 10. IN1 OPTO -     |
| 5. OUT2 OPTO -  | 11. IN2 TTL Gnd    |
| 6. OUT1 TTL Gnd | 12. OUT2 OPTO +    |

Connector: Hirose HR 10A-10R-12PB(71)

Rev: cxp\_t4940\_r3\_2019

Quality Management System ISO 9001:2015 Registered  
Environmental Management System ISO 14001:2015 Registered  
DDTC Registered (Directorate of Defense Trade Controls, US Department of State)



IMPERX 6421 Congress Ave., Boca Raton, FL 33487, USA  
Tel: +1-561-989-0006. Email: sales@imperx.com

WWW.IMPERX.COM

Technical data has been fully checked, but accuracy of printed matter is not guaranteed. Subject to change without notice. Copyright 2019.