

CHEETAH

RUGGEDIZED CAMERA SERIES

C3220 CMOS 7.1 MP Camera Link®



Imperx: C3220

The CLF-C3220 camera features the Sony Pregius IMX420 Global Shutter CMOS sensor with a native resolution of 3216 x 2208 in a 1.1" optical format delivering up to 74 frames per second with Camera Link® Full Power over Camera Link (PoCL®) output. The Sony Pregius image sensor delivers outstanding sensitivity and excellent image quality. Imperx puts you in control by providing full access to raw data without corrections. Using the simple intuitive graphical user interface, you can quickly apply image corrections, if desired. The C3220's flexibility, image quality, and speed make it suitable for a broad range of diverse and demanding applications, but "one size doesn't fit all," and Imperx can help optimize the camera to your exact requirements.

Specifications


Feature	Description	Feature	Description
Output Interface	Camera Link® Base, Medium, Full w/PoCL®	Strobe Output	2 strobes, programmable position and duration
Resolution	3216 (H) x 2208 (V)	Pulse Generator	Yes, programmable
Sensor	Sony Pregius IMX420 CMOS Color/Mono	Data Correction	4 LUTs pre-programmed with Gamma 0.45; Bad pixel correction (static, dynamic)
Sensor Format	14.5 mm (H) x 9.9 mm (V), 1.1" optical format	Lens Mount	C-Mount (default)
Pixel Size	4.5 microns square	P-IRIS	Optional
Shutter	Global shutter (GS)	P-IRIS Control	Auto, Programmable
Sensor Digitization	8, 10, 12-bit	Supply Voltage Range	12 V DC (5 V – 30 V), 1.5 A inrush
Frame Rate	74 (8-bit), 60 (10-bit), 50 (12-bit)	Camera Current	Typical: 200 mA/12 V
Dynamic Range	77 dB	PoCL capable	Yes, in Base/Medium/Full mode
Output Bit Depth	8, 10, 12-bit	Size - Width/Height/Length	37 mm (W) x 37 mm (H) x 48.6 mm (L)
Analog/Digital Gain	Manual, Auto; 0-48 dB, 480 steps	Weight	91.8 g
Black Level Offset	Manual (0-255), Auto	Vibration, Shock	TBD
Digital Gain	1x (0 dB) to 4x (12 dB) with a precision of 0.001x	Environmental	-30 °C to +75 °C
White Balance	Manual, Auto, Off	Humidity	10% to 90% non-condensing
Shutter Speed	1 µs/step, 5 µs to 16.0 s	MTBF	TBD
Exposure Control	Off, Internal, External, Auto	Military Standard	MIL-STD-810G
Regions of Interest (ROI)	2 ROI	Regulatory	FCC Part 15, CE, RoHS
Binning	1x2, 2x1, 2x2		
Sub-sampling	1x2, 2x1, 2x2		
Trigger Inputs	External, Pulse generator, Software, Computer		
Trigger Options	Edge, Pulse width, Trigger filter, Trigger delay, Debounce		
Trigger Modes	Free run, Standard, Fast		
External Inputs/Outputs	2 IN (OPTO, LVTTTL) / 2 OUT (OPTO, TTL)		

Imperx: C3220 Applications


The CLF-C3220 incorporates a number of unique features tailored to reduce system complexity, maximize interface bandwidth, and expand the usable operational range.

Aerospace • Satellites • Surveillance • Ball Grid Array • Printed Circuit Board Inspection • Motion Analysis • Broadcast Television • Telepresence • Unmanned Aerial Vehicles • Machine Vision • Intelligent Traffic Systems • Aerial Imaging • Open Road Tolling Systems • Situational Awareness

Absolute Quantum Efficiency

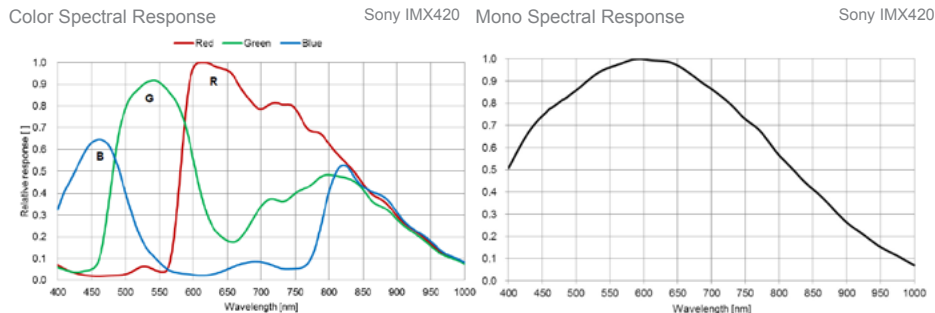


Dimensions

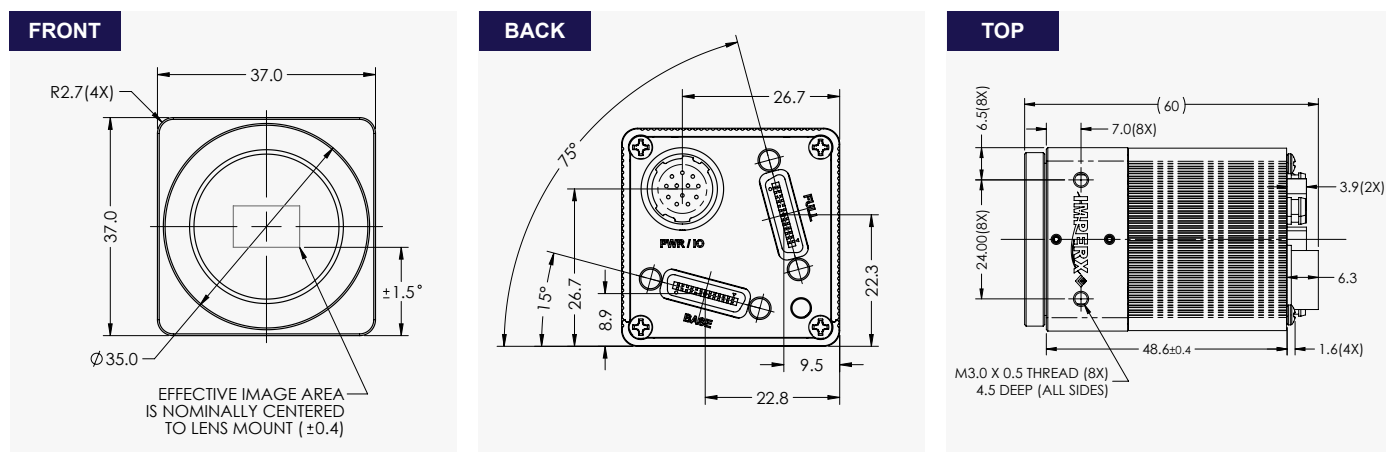

Ordering Information

Output Interface	Camera Link® Full (CLF) w/PoCL®
Sensor Types available	Monochrome Bayer Color
Lens Mounts	C-Mount (Default) P-Iris (optional)
Accessories (Sold separately)	PS12V04A-Power Supply w/ 1 input and 1 output

Software/Drivers/Interface

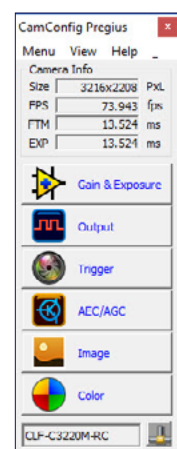

Hirose Connectors

Power and I/O Interface	
	<ul style="list-style-type: none"> 1. 12 VDC Return 2. +12 VDC 3. Reserved 4. Reserved 5. OUT2 RTN (OPTO) 6. OUT1 RTN 7. OUT1 (TTL) 8. IN1 (OPTO) 9. IN2 (LVTTTL) 10. IN1 RTN 11. IN2 RTN 12. OUT2 (OPTO)

Rev: cl_c3220_r3_2019

Quality Management System ISO 9001:2015 Registered
Environmental Management System ISO 14001:2015 Registered
DDTC Registered (Directorate of Defense Trade Controls, US Department of State)



IMPERX 6421 Congress Ave., Boca Raton, FL 33487, USA
Tel: +1-561-989-0006. Email: sales@imperx.com

WWW.IMPERX.COM

Technical data has been fully checked, but accuracy of printed matter is not guaranteed. Subject to change without notice. Copyright 2019.