

BOBCAT

INTELLIGENT CAMERA SERIES



IGV-B2510



IMPERX IGV-B2510 is an advanced progressive scan, fully programmable CCD camera designed for imaging applications that require high quality images, powerful features and flexibility. The camera is small, light weight, and built around SONY's ICX-655 3.45 micron interline transfer CCD image sensor with a 2/3" optical format.

IMPERX IGV-B2510 provides an image resolution of 2456 x 2058 and delivers up to 9.6 frames per second at full resolution. The camera's 14 bit internal data image processing engine is based on an industrial grade high-speed, high-density FPGA, enabling a broad standard feature set and easy implementation of demanding custom imaging solutions. The thermally optimized, mechanical and electrical design plus the extended operating temperature range (-40°C to +85°C), and high MTBF of 660,000 hours @ 40C, make this GigE Vision® camera a perfect fit for the most demanding industrial, medical, scientific and military applications. This camera is also available with CoaXPress and Camera Link® interfaces.

Features

- 2456 x 2058 image resolution
- Mono or color 8, 10, 12 bit dual output
- Normal and over-clock operation (6.5/9.6 fps)
- 10/100/1000 Gigabit Ethernet LAN (RJ-45)
- RS232 serial communication
- Analog and digital gain and offset control
- 1x, 2x, 3x, 4x, 8x horizontal and vertical binning
- Areas of Interest (AOIs): 1 master + 6 slaves
- Programmable horizontal and vertical resolution
- Programmable line time, frame time and speed
- Programmable external trigger:
- Internal/External exposure control
- Standard, fast, frame accumulation, double and asynchronous triggering modes
- Automatic gain, exposure and iris control

- Automatic white balance
- Internal/External H and V sync input/output
- Left/right digital bit shift
- Test image with image superimposition
- Built in pulse generator
- Programmable I/O mapping
- Dynamic transfer function correction
- Dynamic black level correction
- Defective and hot pixel correction (static/dynamic)
- Temperature monitor
- Field upgradeable firmware
- Customer defined Look Up Table (LUT)
- Reverse image (H mirror)
- MTBF of 660,000 hours @ 40°C

APPLICATIONS

- Aerial Mapping
- Aerial Robots: Military, Police
- Aerospace
- Agriculture
- Automation

- Automotive
- Biometrics
- Broadcasting
- Printed Circuit Board (PCB)
- Electronics
- Energy/Solar/Wind Power

- Flat Panel Inspection
- Food/Beverage
- Homeland Security
- Law Enforcement
- Intelligent Traffic Systems (ITS)
- Medical Devices/Imaging

- Metrology
- Microscopy
- Military/Defense
- Pharmaceuticals
- Particle Image Velocimetry (PIV)
- Radiology

- Robotics
- Scientific Apps
- Surveillance
- Semiconductors
- Transportation
- Textile/Apparel



BOBCAT IGV-B2510 Specifications

Maximum Resolution	2456 x 2058
Sensor Type	2/3", CCD ICX-655
Pixel Size	3.45 μ m
Frame Rate	6.5/9.6 fps (normal/overclock)
Max Frame Rate	50 FPS
Minimum S/N ratio	53 db
Video Output	RJ45 CAT5e, CAT6
Output Format	Mono or color 8, 10, 12 bit dual output
Binning H & V	x1, x2, x3, x4, x8
Area of Interest	AOIs: 1 master + 6 slaves
Shutter Speed	1/80,000 to 1/11 sec (nom)
Long Integration	Up to 16 sec
Gamma Correction	G=1.0, G= 0.45, user upgradable LUT
Video Gain	36 dB range, 1024 steps, 0.0351 dB per step
Exposure and AGC	Manual, Auto, Programmable
Iris Control	Auto, Programmable
Strobe Output	Programmable position and duration
Image Overlay	Yes, Programmable
RS232 Interface	Yes

Data Corrections
Hardware Trigger

Software Trigger


Trigger Modes

Min. Illumination
Supply Input Range
Power Consumption
Size (W x H x L)
Weight
Lens Mount
Vibration, Shock
Environmental

Humidity
MTBF
Regulatory

DPC, HPC, LUT
LVTTTL or TTL via IN1/IN2, level, edge,
pulse-width, programmable
Software internal, level, edge,
pulse-width, programmable
Programmable, standard, double exposure,
fast, frame accumulation, asynchronous
0.5 Lux, F/1.4
12 VDC, (10 V – 15 V)
4.8 W, 400 mA steady (Typ), 1.5 A inrush
46 x 46 x 63mm
243g
C-Mount
10G (20 - 200)Hz XYZ, 70G
Operation: (-40° to +85°)C
Storage: (-40° to +90°)C
10% to 90% non-condensing
660,000 hours @ 40°C
FCC part 15, Class A, CE, RoHS

Power and I/O Interface:



1 12V DC Return	7 OUT1 Signal
2 +12V DC	8 IN1 Signal
3 IRIS VCC	9 IN2 Signal
4 IRIS Video	10 IN1/2 Return
5 IRIS Return	11 Reserved
6 OUT1/2 Return	12 OUT2 Signal

Connector: Hirose HR 10A-10R-12PB(71)

Order Options:


IGV-B2510M-SC0 Monochrome GigE Vision Output
IGV-B2510C-SC0 Color GigE Vision Output

For specific details and ordering information, consult the camera user's manual or contact IMPERX at sales@imperx.com.

Accessories:

PS12V04: Power Supply (sold separately)

Spectral Response

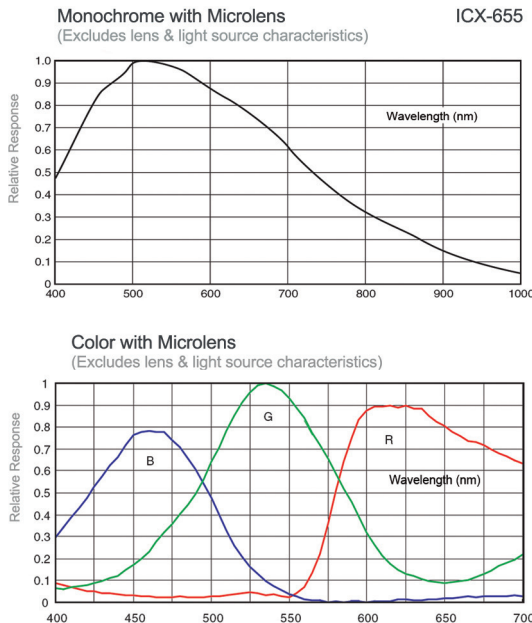

Software/Drivers/Interface

GigE Vision Protocol: 10/100/1000 Mb/s, 802.3, Ethernet V2.0, IPv4, IGMPv.2, UDP and ICMP, and GenI-Cam

eBUS Drivers: Windows XP 32b, XP 64b, Vista 32b, Vista 64b, 7 32b, 7 64b. Linux: SuSE v10, RedHat 5 (Kernel 2.6)


Software: Pleora GEVPlayer, IMPERX GEV Player (includes Cam-Config GUI), Bobcat GEV Download Utility, Net Command

SDK: PureGEV GigE Vision SDK for Windows (Microsoft Visual C++, COM, .NET, C#, VB.NET, Borland C++Builder), PureGEV, GigE Vision SDK for Linux

Compatible with: Labview, Halcon, MIL, Common Vision BLOX, StreamPix, ActiveGigE, and others

Multicast capable

Mechanical Dimensions

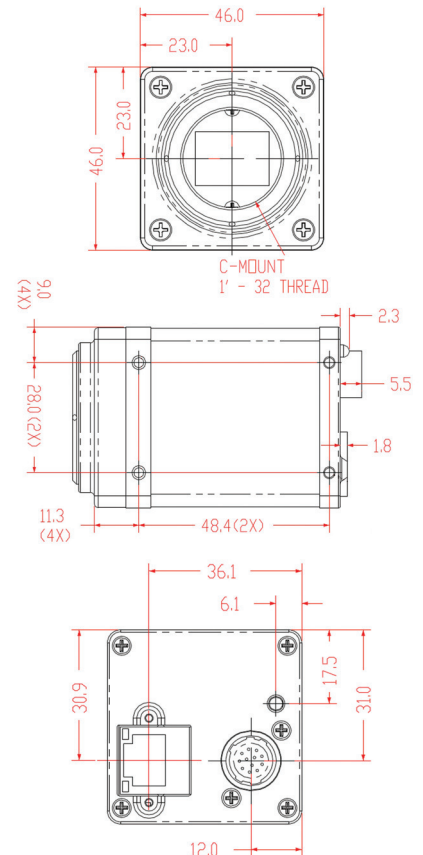

IMPERX | 6421 Congress Avenue | Boca Raton | FL 33487 | USA
Phone: +1-561-989-0006 | 1-866-849-1662 | Fax: +1-561-989-0045
www.imperx.com | sales@imperx.com

Copyright © 2013. IMPERX product information is subject to change without notice.

